

TOPS
35500

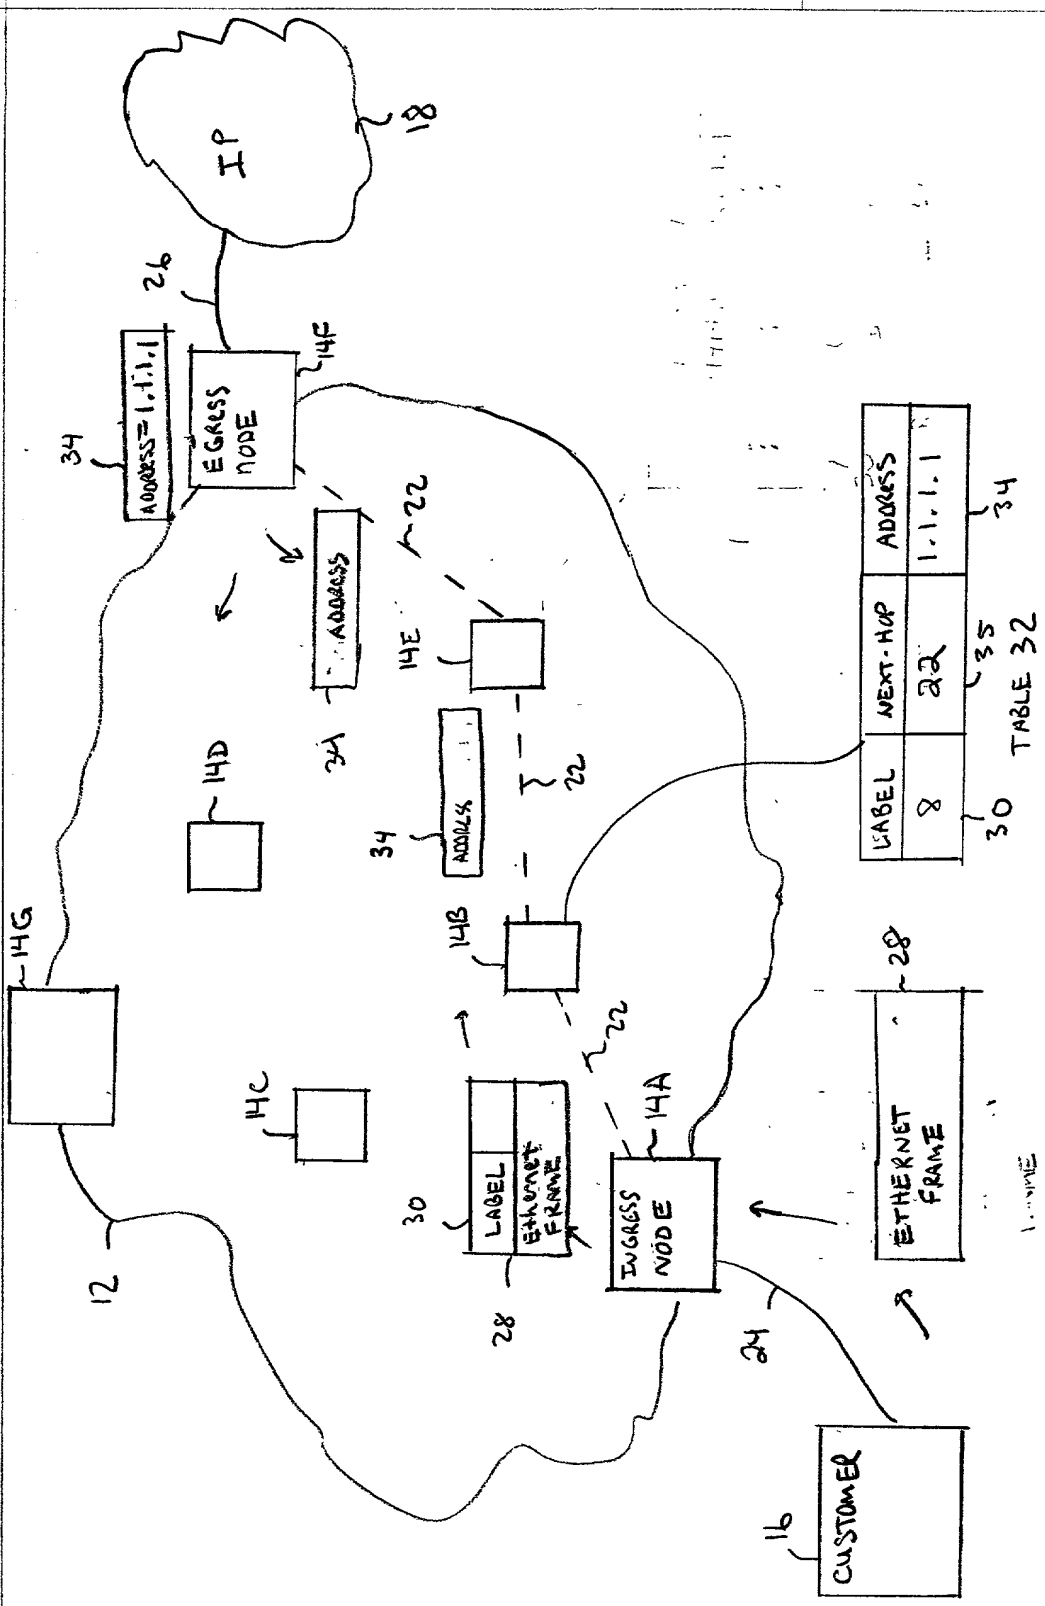


FIG. 1

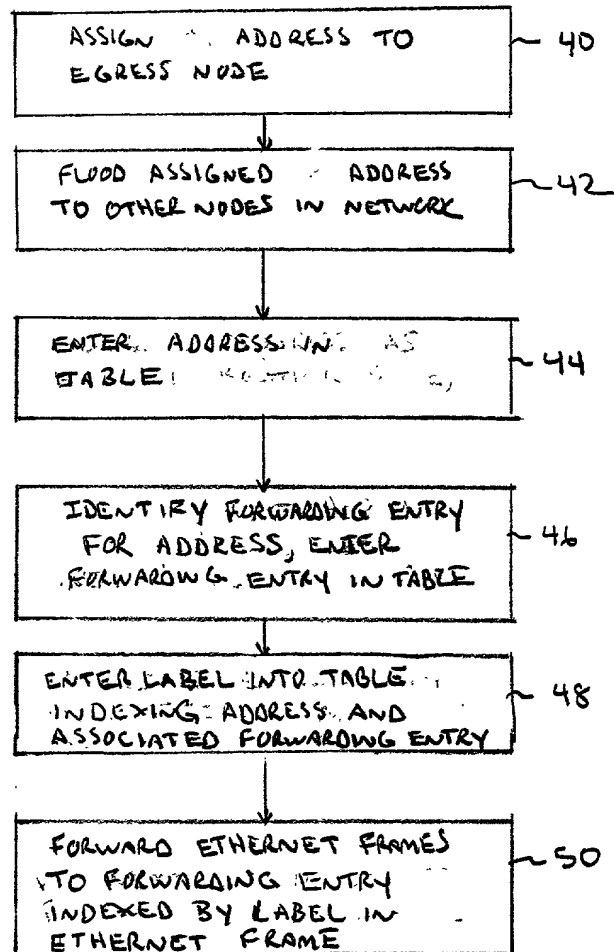


FIG. 2

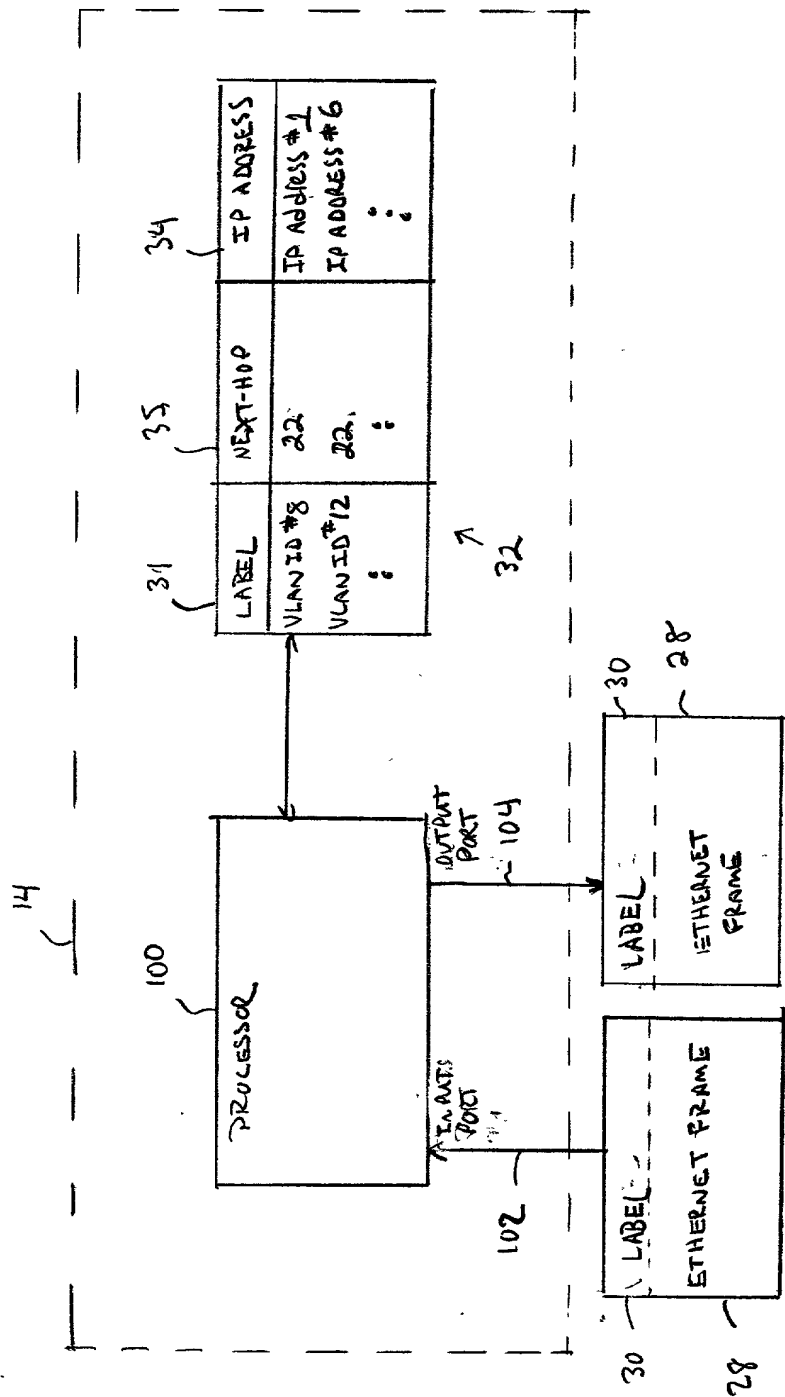


FIG. 3


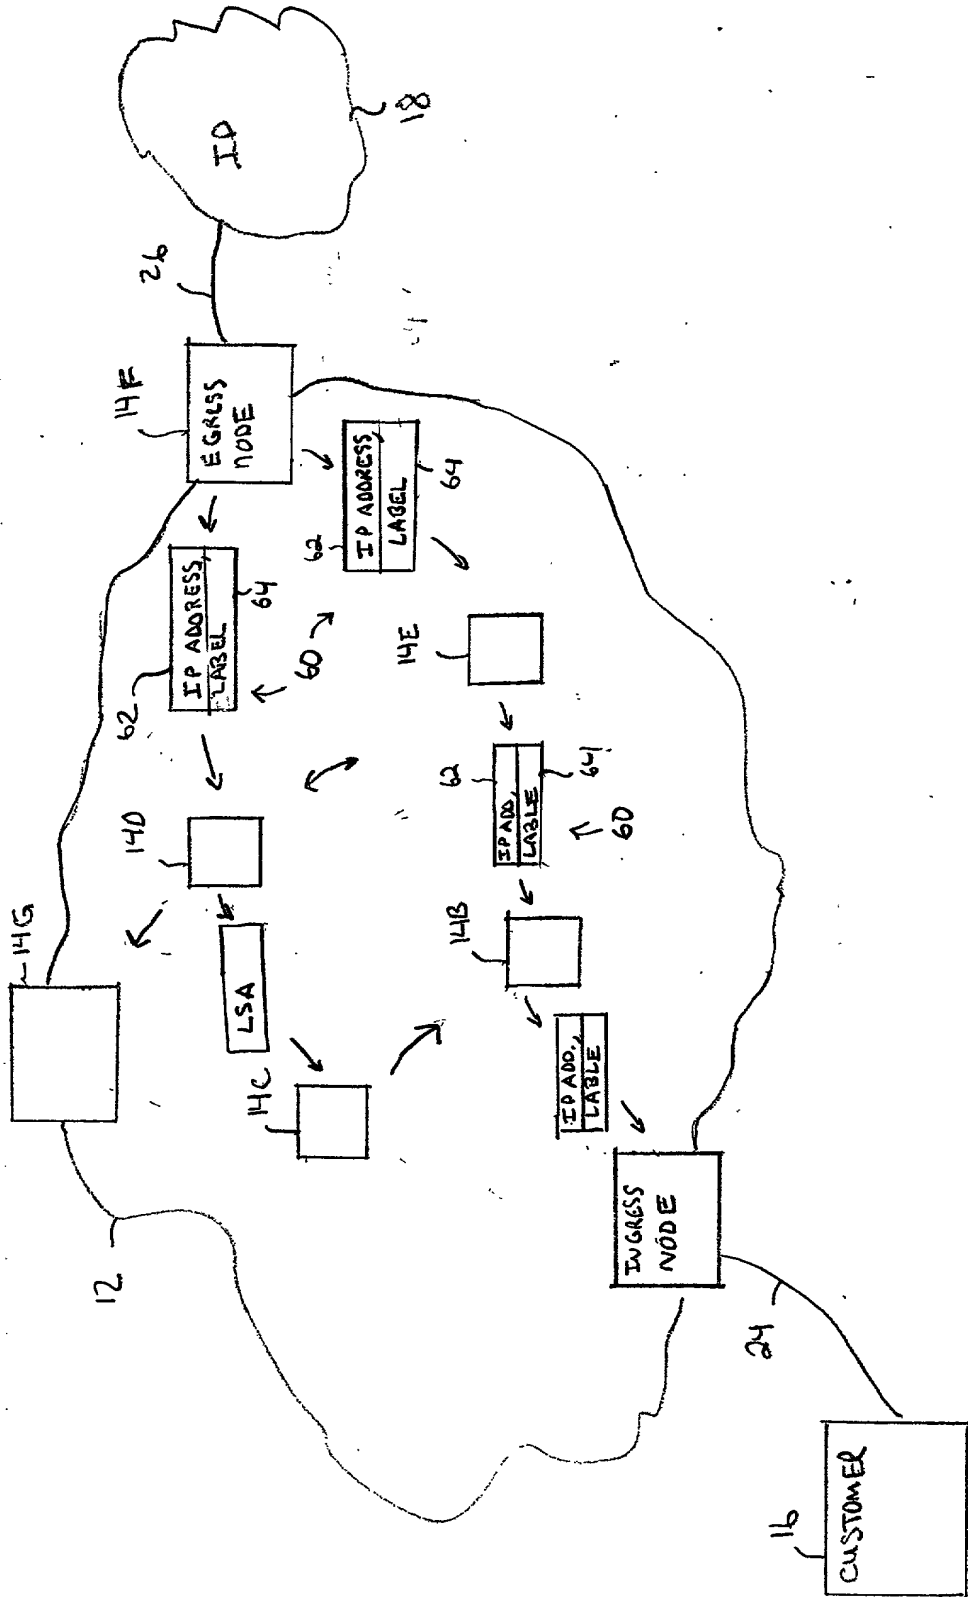


FIG. 4

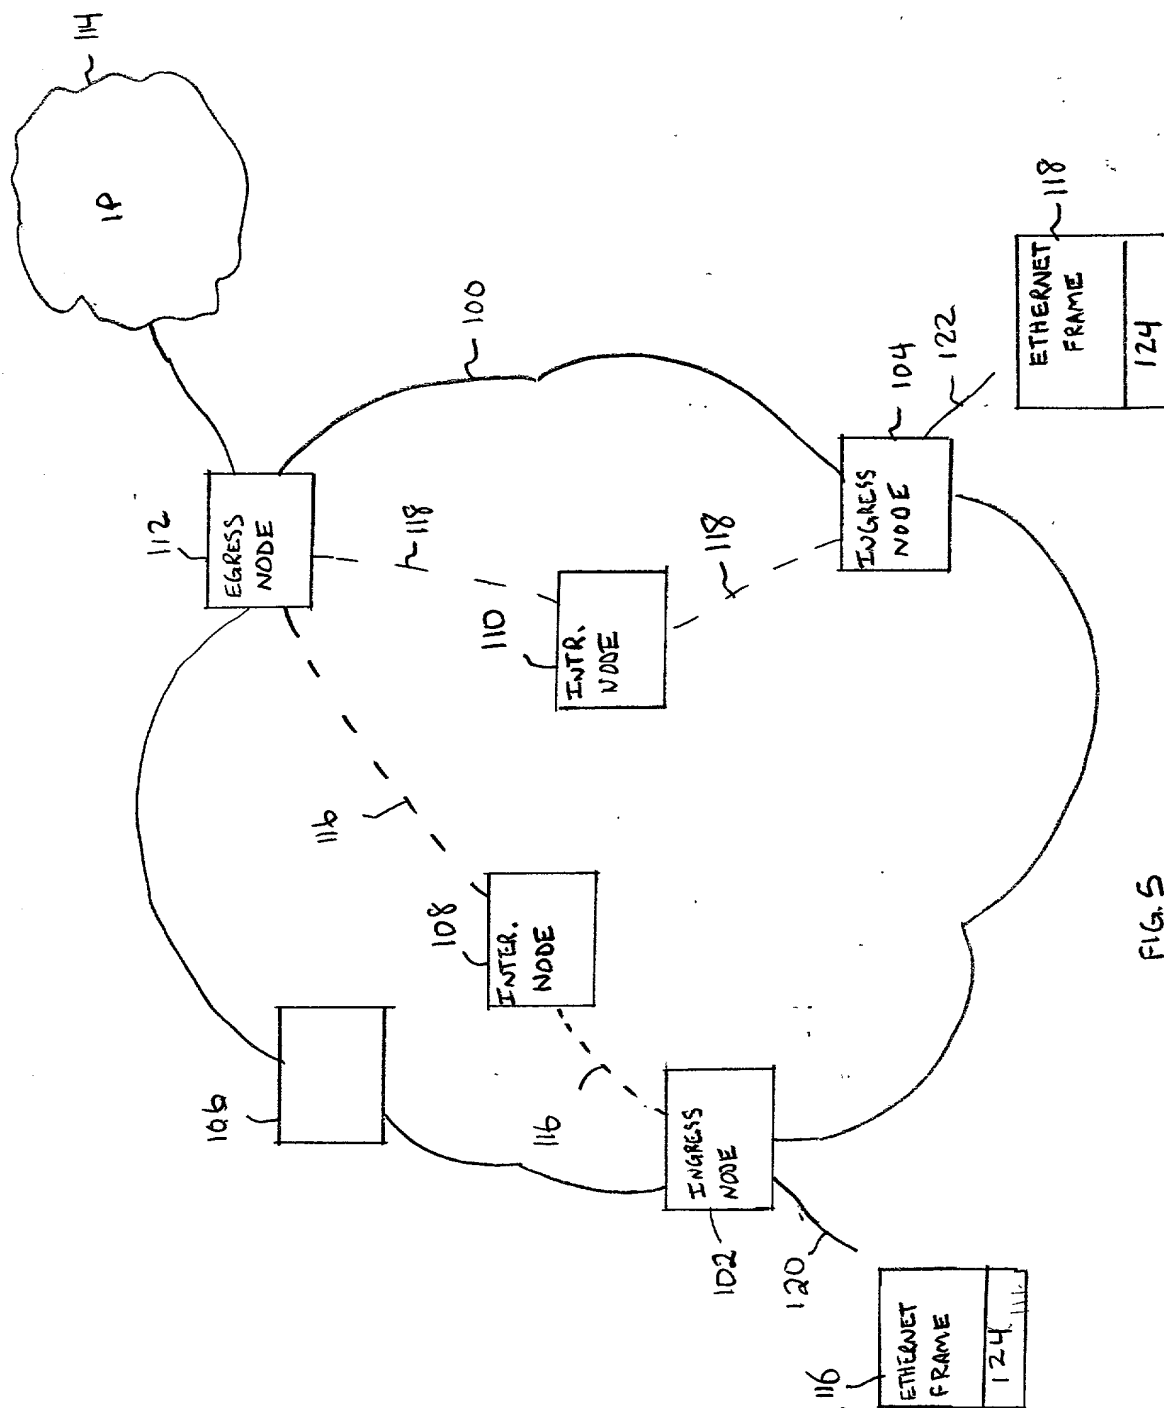

60 →

78

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1

LS age																<u>72</u> Options								LSA Type <u>74</u>							

Opaque Type																Opaque ID <u>80</u>															

Advertising Router																															

LS Sequence Number																															

LS checksum																Length															

EGRESS																node IP address <u>62</u>															

Reserved <u>83</u>																VLAN Id <u>64</u>															

FIG. 6

90 →

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1			
LS age										<u>72</u> Options										LSA Type <u>74</u>														
Opaque Type										Opaque ID <u>80</u>																								
Advertising Router																																		
LS Sequence Number																																		
LS checksum															Length																			
<u>EGRESS</u>															node IP address <u>62</u>																			
<u>92</u> Count field										VLAN Id <u>64</u>																								
VLAN Id <u>64</u>										VLAN Id <u>64</u>										QoS														
															<u>98</u>										<u>96</u>					<u>95</u>				

FIG. 7